January 2019

PRESS

Achieving maximum energy savings with Kaeser's next generation CSD(X) series

Kaeser Compressors has launched its next generation CSD(X) series of variable speed rotary screw compressors which are paving the way for the highest current efficiency gain, and thus reduced energy costs, when using variable-speed compressors.

As a leading compressed air systems provider and a renowned industry trendsetter, the family-owned company proudly presented yet another technological milestone some time ago: the introduction of synchronous reluctance motors for its SFC variable-speed screw compressors. After the ASD series, the CSD and CSDX series are the next to be equipped with this technology. This means significantly lower energy costs for end users, particularly in the crucial partial-load range, compared to the previous solution with asynchronous motors.

With the Sigma Profile and innovative drive concepts, Kaeser's rotary screw compressors already deliver outstanding performance and reliability. Combined with energy efficiency and space-saving design they deliver more compressed air and more energy savings. The roll-out of synchronous reluctance technology was the next step towards even greater efficiency.

The major advantage of this complete solution, which was developed in partnership with Siemens, is an efficiency gain of approximately ten percent in the partial-load range. Thanks to the innovative motors and the top IES2 classification as per the new EN 50598 efficiency standard, this solution offers unprecedented efficiency. For example, in the case of a CSD SFC series screw compressor, this translates into average energy cost savings of around



2/4

\$1,250 per year, based on approximately 6,000 operating hours at a rate of 10 cents per

kilowatt hour. End users therefore not only enjoy maximum flexibility for specific applications

and varying environmental conditions, but also with regard to load response.

Variable-speed drive with high system efficiency

Where a compressed air system includes a number of compressors, continuously running

compressors with IE4 motors cover base load demand, whilst additional peak-load

compressors respond flexibly to meet extra demand. To ensure maximum efficiency the

system is controlled by a Sigma Air Manager 4.0. With the Siemens synchronous reluctance

drive systems, this will be performed with even greater efficiency in the all-important partial

load range.

This development has come about in response to the fact that the new EN 50598 eco-design

standard applies not only to the efficiency values of individual drives, but represents a shift in

regulatory emphasis to overall system efficiency and therefore assesses the compliance of

variable-speed drive solutions, based on their overall system efficiency. With its variable-

speed version (SFC) of the ASD to CSDX series, Kaeser paves the way for end users to

embark on a path of minimal energy consumption and minimal operating costs.

The best of both worlds: synchronous and asynchronous motor technology

This new and innovative series of general-purpose motors combines the strengths of both

asynchronous and synchronous motors in a single drive system. No aluminium, copper or

expensive rare earth magnets are used in the rotors. Instead they are made of electrical steel

with a specialised profile and arranged in series, making the drive highly durable and

maintenance friendly, the characteristic advantages of asynchronous motors.

On the other hand, the control properties of the new motors are comparable to those of

synchronous motors. The special rotor design enables reluctance motors to deliver high

KAESER COMPRESSORS

3/4

speeds without additional rotor warming due to current flow. The key to this lies in optimised

matching of the drive system elements, i.e. the motor and frequency converter. It is the

perfectly harmonised interplay between these two components that facilitates maximum

energy savings.

The CSD(X) series of rotary screw compressors with SFC variable speed drives from Kaeser

are available with drive powers of 45 to 90 kW, and produce flow rates from 2.13 to 16.03

m³/min, designed for pressures 7.5 to 13 bar. For more information from Kaeser visit

www.kaeser.com.au or phone 1800 640 611.

-END-

Editors Notes

From 2.2 to 500 kW, Kaeser Compressors manufactures a wide range of compressors and associated auxiliary equipment that meet the varying requirements of a diverse range of industries and

applications.

One of the world's largest manufacturers of rotary screw compressors, Kaeser Compressors is represented globally in over 100 countries through a dedicated network of branches, subsidiary

companies and authorised partners.

Kaeser Compressors Australia provides comprehensive sales and service from its 30,000 ft² purpose built factory in Dandenong, Victoria alongside an extensive network of sales and service centres and

authorised partners that cover Australia, New Zealand and New Caledonia.

For editorial and advertising enquiries contact:

Press office: +61 3 9791 5999 Fax: +61 3 9791 5733

E-mail: info.australia@kaeser.com

KAESER COMPRESSORS Australia Pty Ltd – 45 Zenith Road, Dandenong South, VIC 3175,

Australia

Phone: +61 3 9791 5999 – www.kaeser.com.au – E-mail: info.australia@kaeser.com

File: A-CSD-X-2019-aus

Approved for publication, copy acknowledgement appreciated




Image:



003_Image 1_KAESER CSD CSDX series.jpg

Caption: The variable-speed versions of Kaeser's CSD/CSDX series rotary screw compressors feature a synchronous reluctance drive system from Siemens.

System efficiency comparison - Motor principles

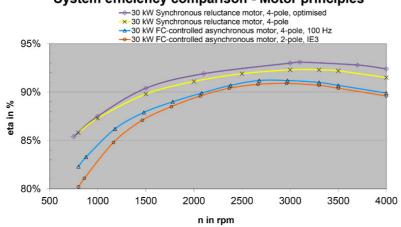

003_Image 2_System efficiency comparison.jpg

Caption: The synchronous reluctance motor boasts significantly enhanced efficiency rates. The variable-speed versions of Kaeser's CSD/CSDX series rotary screw compressors feature a synchronous reluctance drive system from Siemens.

((Kaeser photo – free for publication))

